

DS-2CE56D5T-VFIT3

HD1080P Turbo HD Outdoor Vari-focal EXIR Turret Camera




EXIR



Key features

- HD1080P Video Output
- Adopt HDTVl Technology
- True Day/Night
- 2.8 - 12mm vari-focal lens
- OSD menu, 3D DNR, Smart IR
- EXIR technology, 50m IR distance
- Up the Coax(via coaxial cable)
- 120 dB Wide Dynamic Range

Dimensions

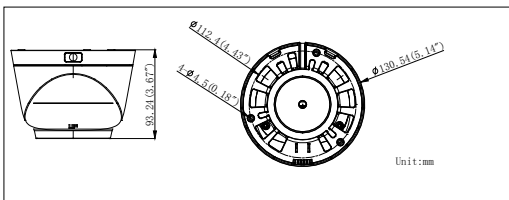

Accessories



Video balun
DS-1H18

Available models

DS-2CE56D5T-VFIT3

| DS-2CE56D5T-VFIT3 | |
|--------------------------------|---|
| Camera | |
| Image Sensor | 1 / 3" Progressive Scan CMOS |
| Signal System | PAL / NTSC |
| Effective Pixels | 1920(H)*1080(V) |
| Min. Illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR |
| Shutter speed | 1/25(1/30) s to 1/50,000 s |
| Lens | 2.8-12mm @ F1.4 Angle of view: 92° - 32° |
| Lens Mount | φ14 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° |
| Day & Night | ICR |
| Wide dynamic range | 120 dB |
| Synchronization | Internal synchronization |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| CVBS Output | 1Vp-p Composite Output(75Ω / BNC) |
| S / N Ratio | More than 52dB |
| Menu | |
| Scene | Indoor, Outdoor, Indoor1, LOW-LIGHT |
| Camera ID | On/off (15 characters, position programmable) |
| AGC | Support |
| D/N Mode | Color/BW/EXT |
| White Balance | ATW, AWC-SET, Indoor, Outdoor, Manual |
| Privacy Mask | On/Off, maximum 8 zones |
| Motion Detection | On/Off, maximum 4 zones |
| BLC | Support |
| Anti-flicker | On/off |
| Language | English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic |
| Function | Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM |
| General | |
| Working Temperature / Humidity | -30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC |
| Power Consumption | Max. 7W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 50m |
| Communication | Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron) |
| Dimensions | φ130.54 × 93.24 mm (φ 5.14" × 3.67") |
| Weight | 300 g (0.66 lb) |